



Shining Star at Commercial Kitchen
STARION

Ho-Jin Kim, Korean famous Actor
Spokesperson for STARION




STARION

A refrigerator that works around the clock; Electricity bill to worry about

With STARION commercial refrigerator, there is no need to worry about the electricity bill any longer.

67% More Economical

※ Exchange Rate: USD 1 = 1,125won

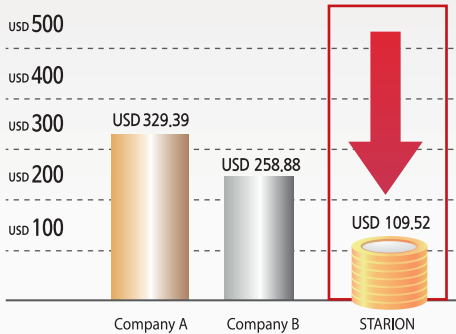

Power consumption	63.0 kWh/mth
CO ₂	37 g/hr
Model No : SR-S45AS Capacity : 1,070 L / 37.8 cu.ft.	
USD 109.52/yr	



* Data is based on the tests conducted by the company with ISO15502 Standards.
 * Based on SR-S45A* model
 * Based on Korean Standards
[Comparison Table on Unit Price for Power Consumption]

Don't worry. The refrigerator is working properly right now!

Implementation of low-noise design at **43dB**

* Based on SR-S25D* model




[Noise Measurements by Products]

500ℓ/17.7 cu.ft. ALL Freezer (SR-S25D* Model)	43dB
500ℓ/17.7 cu.ft. ALL Refrigerator (SR-S25E* Model)	50dB
1100ℓ/38.8 cu.ft. 1/4 Freezer (SR-S45A* Model)	44dB
1100ℓ/38.8 cu.ft. 1/2 Freezer (SR-S45B* Model)	45dB
1100ℓ/38.8 cu.ft. ALL Freezer (SR-S45D* Model)	48dB
1100ℓ/38.8 cu.ft. ALL Refrigerator (SR-S45E* Model)	45dB
1700ℓ/60.0 cu.ft. 1/3 Freezer (SR-S65B* Model)	45dB
1700ℓ/60.0 cu.ft. ALL Freezer (SR-S65D* Model)	45dB

STARION | Refrigerator

STARION 1100ℓ/38.8 cu.ft. 45Box-Metal

STARION 1100ℓ/38.8 cu.ft. 45Box-Stainless Steel

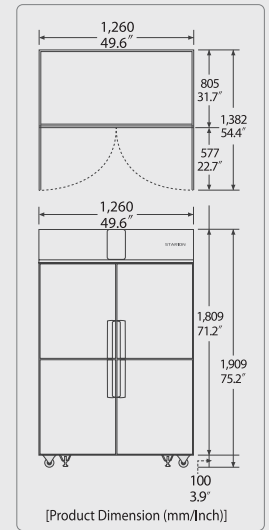

Type	Model	Material		Dimension (WxDxH)mm/Inch	Weight (kg/lb)	Capacity(ℓ/cu.ft.)			Temperature Range		Power Consumption (kWh/M)
		External	Internal			Freezer Chamber	Refrigeration Chamber	Total	Freezer Chamber	Refrigeration Chamber	
 1100ℓ / 38.8 cu.ft. 1/4 Freezer	SR-S45AI**	Metal	STS	1,260x805x1,909 49.6"x31.7"x75.2"	157	240	830	1,070	6-level Temperature Control (-11°F ~ 41°F) (-24°C ~ 5°C)	6-level Temperature Control (23°F ~ 44.6°F) (-5°C ~ 7°C)	63.0
	SR-S45AS**	STS			346						
 1100ℓ / 38.8 cu.ft. 1/2 Freezer (Vertical)	SR-S45BI**	Metal	STS	1,260x805x1,909 49.6"x31.7"x75.2"	147	530	530	1,060	6-level Temperature Control (-11°F ~ 41°F) (-24°C ~ 5°C)	6-level Temperature Control (23°F ~ 44.6°F) (-5°C ~ 7°C)	80.0
	SR-S45BS**	STS			324						
 1100ℓ / 38.8 cu.ft. 1/2 Freezer (Horizontal)	SR-S45CI**	Metal	STS	1,260x805x1,909 49.6"x31.7"x75.2"	145	532	541	1,073	6-level Temperature Control (-11°F ~ 41°F) (-24°C ~ 5°C)	6-level Temperature Control (23°F ~ 44.6°F) (-5°C ~ 7°C)	86.0
	SR-S45CS**	STS			320						
 1100ℓ / 38.8 cu.ft. All Freezer	SR-S45DI**	Metal	STS	1,260x805x1,909 49.6"x31.7"x75.2"	140	1,110	—	1,110	6-level Temperature Control (-11°F ~ 41°F) (-24°C ~ 5°C)	—	N/A
	SR-S45DS**	STS			309						
 1100ℓ / 38.8 cu.ft. All Refrigeration	SR-S45EI**	Metal	STS	1,260x805x1,909 49.6"x31.7"x75.2"	124	—	1,110	1,110	—	6-level Temperature Control (23°F ~ 44.6°F) (-5°C ~ 7°C)	 35.0
	SR-S45ES**	STS			273						

* STS = Stainless Steel / Power Consumption = Korean Standards

Preserve Freshness from the Farm to the Kitchen!

Guaranteed by STARION technology accumulated for over 50 years Technology with 5 Decades of History.



67%
1 year-long electricity bill at a mere approx. USD 109.52
 67% more savings on the electricity bill compared to equivalent models from competitors (Based on SR-S45A* model, measurements from the test conducted by the company with ISO5502 Standards)

User-friendly drainage structure
 All watery fluid is designed to be gathered at the front because the rear-side surface is 1 degree higher than the front-side surface in addition to separate waterways. This feature allows easy drainage and cleaning without having to remove food materials from the refrigerator.

Design of Inner Materials with Stainless Steel
 High-end stainless steel materials ensure convenient cleaning and easy maintenance.

Height-adjustable Shelves
 With height-adjustable shelves, the space inside the refrigerator can be fully utilized depending on the size and volume of food materials to store.

More Spacious Storage Space without Bottle Rails
 By removing the rails for bottles, it offers more space to store food materials.

43dB
43dB Low-noise Design
 Don't worry. The refrigerator is properly working right now. (Based on SR-S25D* model)

High-density polyurethane foam
 The thickness of polyurethane foam varies at each section based on the researches upon optimal thickness of polyurethane foam in order to minimize heat loss and secure maximum storage space.

Instant Freezing
 The feature runs freezing operation for 2 hours and automatically shuts off by simply pressing a button. It assures easy and prompt cold storage of food materials.

Easy-to-use Temperature Control Unit
 With a special sensor, temperature can be easily controlled in addition to convenience of temperature verification; and it also preserves the freshness of food materials at optimal condition for long durations.

No silicon, no fungus!
 No need to worry about fungus since STARION commercial refrigerator is completely free of silicon.


Automatic Door-Shut within 45 degrees
 Automatic door-shut feature ensures the door to be closed within 45 degrees, which is a must-have feature for commercial kitchens.

Frost Removal Feature
 This feature removes frost which is generated every time the door opens and shuts. It enhances preservation and usability of food materials.

Application of LG Compressor with Powerful Freezing Capability
 Armed with a powerful LG Compressor, it provides ever-powerful refrigeration and freezing functions.

STARION 1700ℓ/60 cu.ft. 65Box

“ Easy-to-assemble Refrigerator
TWO refrigerators can become One
massive refrigerator! ”

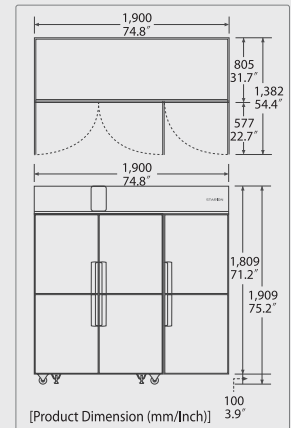

Type	Model	Material		Dimension (WxDxH)mm/Inch	Weight (kg/lb)	Capacity(ℓ/cu.ft.)			Temperature Range		Power Consumption (kWh/M)
		External	Internal			Freezer Chamber	Refrigeration Chamber	Total	Freezer Chamber	Refrigeration Chamber	
 1700ℓ / 60 cu.ft. 1/3 Freezer	SR-S65BI**	Metal	STS	1,900x805x1,909 74.8"x31.7"x75.2"	212	500	1,110	1,610	6-level Temperature Control (-11°F ~ 41°F) (-24°C ~ 5°C)	6-level Temperature Control (23°F ~ 44.6°F) (-5°C ~ 7°C)	98.0
	SR-S65BS**	STS			346						
 1700ℓ / 60 cu.ft. All Freezer	SR-S65DI**	Metal	STS	1,900x805x1,909 74.8"x31.7"x75.2"	228	1,610	—	1,610	6-level Temperature Control (-11°F ~ 41°F) (-24°C ~ 5°C)	—	N/A
	SR-S65DS**	STS			503						
 1700ℓ / 60 cu.ft. All Refrigeration	SR-S65EI**	Metal	STS	1,900x805x1,909 74.8"x31.7"x75.2"	210	—	1,610	1,610	—	6-level Temperature Control (23°F ~ 44.6°F) (-5°C ~ 7°C)	49.0
	SR-S65ES**	STS			463						


* STS = Stainless Steel / Power Consumption = Korean Standards

STARION 500ℓ/17.7 cu.ft. 25Box



Type	Model	Material		Dimension (WxDxH)mm/Inch	Weight (kg/lb)	Capacity(ℓ/cu.ft.)		
		External	Internal			Freezer Chamber	Refrigeration Chamber	Total
 500ℓ / 17.7 cu.ft. 1/2 Freezer	SR-S25AI**	Metal	STS	640x805x1,909 25.2"x31.7"x75.2"	85	244	240	484
	SR-S25AS**	STS			187			
 500ℓ / 17.7 cu.ft. All Freezer	SR-S25DI**	Metal	STS	640x805x1,909 25.2"x31.7"x75.2"	83	500	—	500
	SR-S25DS**	STS			183			
 500ℓ / 17.7 cu.ft. All Refrigeration	SR-S25EI**	Metal	STS	640x805x1,909 25.2"x31.7"x75.2"	81	—	500	500
	SR-S25ES**	STS			179			

* STS = Stainless Steel

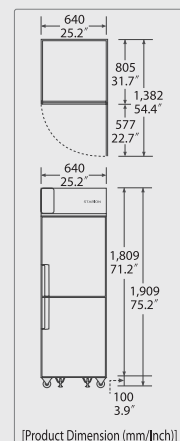


Easy-to-Operate!

Elegant Design, Spacious Storage Space

Minimized machinery chamber, more storage space, highest compression capability and no need to relocate the machinery chamber

STARION Side-dish/Table Refrigerator, Freezer



Innovation with 280mm / 11 inch machinery chamber

With the best compressor embedded, it has radically reduced the volume of the machinery chamber to provide a much wider storage space.



No Silicon, No Fungus!

Free of any silicon materials, STARION Side-dish/Table Refrigerator is completely free from any concerns for fungus.




Easy-to-use Temperature Control Unit

This feature ensures easy and convenient temperature control in addition to convenience of temperature verification.




Application of LG Compressor with Powerful Freezing Capability

Armed with a powerful LG Compressor, it provides ever-powerful refrigeration and freezing functions. And there is no need to relocate the machinery chamber depending on the surrounding environment. (Not applicable to W1200 Table Refrigerator model)



Frost Removal Feature

During frost removal, it allows water-cleaning through drainage. It maintains cleanliness 365 days a year along with clean storage.



Meticulous Temperature Control

With digital touch operation, it allows temperature control by a single degree.




Height-adjustable Shelves


With height-adjustable shelves, it ensures reasonable utilization of the space inside the refrigerator depending on the size and volume of food materials to store.

STARION | Refrigerator

STARION W900 / 35.4" Side-dish Refrigerator



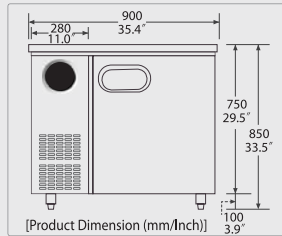


STARION W1000 / 39.4" Side-dish Refrigerator

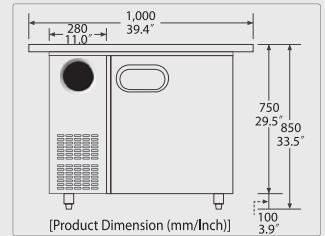

Type	Model	Material		Dimension (WxDxH)mm/Inch	Weight (kg/lb)	Capacity(ℓ/cu.ft.)			Temperature Range Refrigeration Chamber	Remark
		External	Internal			Upper Storage	Inner Storage Space	Total		
 W900 / 35.4" Side-dish Refrigerator	SR-V09EIE**	Metal	STS	900X700X850 35.4"x27.6"x33.5"	54	62 2.2	131 4.6	193 6.8	Control by a single unit (23°F ~ 50°F) (-5°C ~ 10°C)	Left-side Grip
	SR-V09EIF**				119					Right-side Grip
	SR-V09ESE**	51	Left-side Grip							
	SR-V09ESF**	112	Right-side Grip							
 W1000 / 39.4" Side-dish Refrigerator (Customized)	SR-V10EIE**	Metal	STS	1,000X700X850 39.4"x27.6"x33.5"	56	53	264	9.3	Control by a single unit (23°F ~ 50°F) (-5°C ~ 10°C)	Left-side Grip
	SR-V10EIF**				123					Right-side Grip
	SR-V10ESE**	53	Left-side Grip							
	SR-V10ESF**	117	Right-side Grip							

STARION W1200 / 47.2" Side-dish Refrigerator

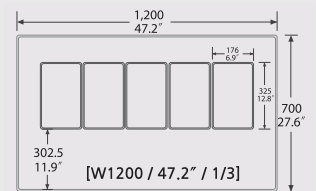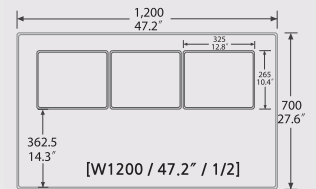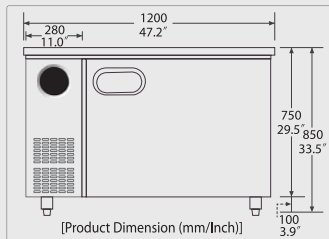


Type	Model	Material		Dimension (WxDxH)mm/Inch	Weight (kg/lb)	Capacity(ℓ/cu.ft.)			Temperature Range Refrigeration Chamber	Remark				
		External	Internal			Upper Storage	Inner Storage Space	Total						
 W1200 / 47.2" Side-dish Refrigerator	SR-V12EIE**	Metal	STS	1,200X700X850 47.2"x27.6"x33.5"	65	86 3.0	209 7.4	295 10.4	Control by a single unit (23°F ~ 50°F) (-5°C ~ 10°C)	Left-side Grip				
	SR-V12EIF**				143					Right-side Grip				
	SR-V12ESE**	62	Left-side Grip											
	SR-V12ESF**	137	Right-side Grip											
 W1200 / 47.2" 1/2 Side-dish Refrigerator	SR-V12EIEVB**	Metal	STS	1,200X700X850 47.2"x27.6"x33.5"	67	55 1.9	209 7.4	264 9.3	Control by a single unit (23°F ~ 50°F) (-5°C ~ 10°C)	Left-side Grip				
	SR-V12ESEVB**				148					Left-side Grip				
 W1200 / 47.2" 1/3 Side-dish Refrigerator	SR-V12EIEVA**	Metal	STS		1,200X700X850 47.2"x27.6"x33.5"					64	64 141	264 9.3	Control by a single unit (23°F ~ 50°F) (-5°C ~ 10°C)	Left-side Grip
	SR-V12EIFVA**									148				Right-side Grip
SR-V12ESEVA**	64	Left-side Grip												
SR-V12ESFVA**	141	Right-side Grip												

* STS = Stainless Steel



STARION | Refrigerator

STARION W1300 / 51.2" Side-dish Refrigerator

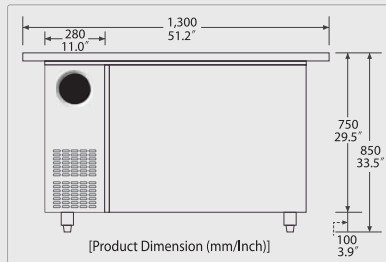


Type	Model	Material		Dimension (WxDxH)mm/Inch	Weight (kg/lb)	Capacity(ℓ/cu.ft.)			Temperature Range Refrigeration Chamber	Remark	
		External	Internal			Upper Storage	Inner Storage Space	Total			
	W1300 / 51.2" Side-dish Refrigerator (Customized)	SR-V13EIE**	Metal	STS 1,300X700X850 51.2"x27.6"x33.5"	67	86	209	295	Control by a single unit (23°F ~ 50°F) (-5°C ~ 10°C)	Left-side Grip	
	SR-V13EIF**	STS	148		3.0					7.4	Right-side Grip
	SR-V13ESE**	STS	64		3.0					7.4	Left-side Grip
	SR-V13ESF**	STS	141		3.0					7.4	Right-side Grip

STARION W1500 / 59.1" Side-dish Refrigerator

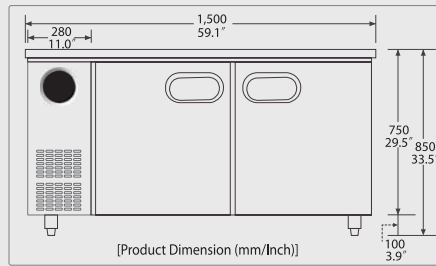

Type	Model	Material		Dimension (WxDxH)mm/Inch	Weight (kg/lb)	Capacity(ℓ/cu.ft.)			Temperature Range Refrigeration Chamber	Remark			
		External	Internal			Upper Storage	Inner Storage Space	Total					
	W1500 / 59.1" Side-dish Refrigerator	SR-V15EIE**	Metal	STS 1,500X700X850 59.1"x27.6"x33.5"	163 / 74	109	287	396	Control by a single unit (23°F ~ 50°F) (-5°C ~ 10°C)	Both doors open			
	SR-V15ESE**	STS	157 / 71		3.8						10.1	13.9	
	W1500 / 59.1" 1/2 Side-dish Refrigerator	SR-V15EIEVB**	Metal		168 / 76						71	287	358
	SR-V15ESEVB**	STS	161 / 73		2.5						10.1	12.6	
	W1500 / 59.1" 1/3 Side-dish Refrigerator	SR-V15EIEVA**	Metal		168 / 76						2.5	10.1	12.6
	SR-V15ESEVA**	STS	161 / 73		2.5						10.1	12.6	

STARION W1800 / 70.9" Side-dish Refrigerator

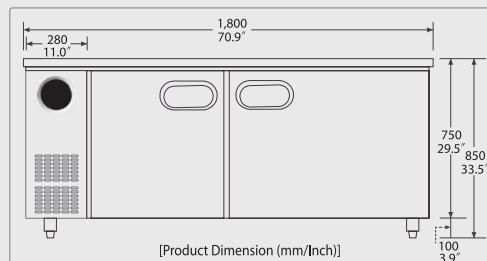


Type	Model	Material		Dimension (WxDxH)mm/Inch	Weight (kg/lb)	Capacity(ℓ/cu.ft.)			Temperature Range Refrigeration Chamber	Remark
		External	Internal			Upper Storage	Inner Storage Space	Total		
	W1800 / 70.9" Side-dish Refrigerator	SR-V18EIE**	Metal	STS 1,800X700X850 70.9"x27.6"x33.5"	196 / 89	132	365	497	Control by a single unit (23°F ~ 50°F) (-5°C ~ 10°C)	Both doors open
	SR-V18ESE**	STS	190 / 86		4.7					


* STS = Stainless Steel

STARION | Refrigerator

STARION W900 / 35.4" Table Refrigerator




STARION W1000 / 39.4" Table Refrigerator



Type	Model	Material		Dimension (WxDxH)mm/Inch	Weight (kg/lb)	Capacity(ℓ/cu.ft.)			Temperature Range Refrigeration Chamber	Remark
		External	Internal			Upper Storage	Inner Storage Space	Total		
 W900 / 35.4" Table	SR-T09EIE**	Metal	STS	900X700X850 35.4"x27.6"x33.5"	54	-	167 5.9	167 5.9	Control by a single unit (23°F ~ 50°F) (-5°C ~ 10°C)	Left-side Grip
	SR-T09EIF**				119					Right-side Grip
	SR-T09ESE**	51	Left-side Grip							
	SR-T09ESF**	112	Right-side Grip							
 W1000 / 39.4" Table (Customized)	SR-T10EIE**	Metal	STS	1,000X700X850 39.4"x27.6"x33.5"	56	-	167 5.9	167 5.9	Control by a single unit (23°F ~ 50°F) (-5°C ~ 10°C)	Left-side Grip
	SR-T10EIF**				123					Right-side Grip
	SR-T10ESE**	53	Left-side Grip							
	SR-T10ESF**	117	Right-side Grip							

STARION W1200 / 47.2" Table Refrigerator, Freezer




Type	Model	Material		Dimension (WxDxH)mm/Inch	Weight (kg/lb)	Capacity(ℓ/cu.ft.)			Temperature Range Refrigeration Chamber	Remark
		External	Internal			Upper Storage	Inner Storage Space	Total		
 W1200 / 47.2" Table	SR-T12EIE	Metal	STS	1,200X700X850 47.2"x27.6"x33.5"	65	-	266 9.4	266 9.4	Control by a single unit (23°F ~ 50°F) (-5°C ~ 10°C)	Left-side Grip
	SR-T12EIF				143					Right-side Grip
	SR-T12ESE	62	Left-side Grip							
	SR-T12ESF	137	Right-side Grip							
 W1200 / 47.2" Table	SR-T12DIE	Metal	STS	1,200X700X850 47.2"x27.6"x33.5"	67	266 9.4	-	266 9.4	Control by a single unit (-13°F ~ 5°F) (-25°C ~ 15°C)	Left-side Grip
	SR-T12DIF				148					Right-side Grip
	SR-T12DSE	64	Left-side Grip							
	SR-T12DSF	141	Right-side Grip							

* STS = Stainless Steel


STARION | Refrigerator

STARION W1300 / 51.2" Table Refrigerator

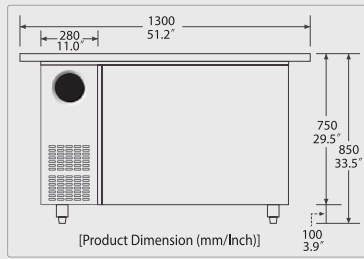


Type	Model	Material		Dimension (WxDxH)mm/Inch	Weight (kg/lb)	Capacity(ℓ/cu.ft.)			Temperature Range		Remark
		External	Internal			Freezer Chamber	Refrigeration Chamber	Total	Refrigeration Chamber		
 W1300 / 51.2" Table (Customized)	SR-T13EIE	Metal		1,300X700X850 51.2"x27.6"x33.5"	67	—	266	9.4	266	Control by a single unit (23°F ~ 50°F)	Left-side Grip
	SR-T13EIF	STS			148						Right-side Grip
	SR-T13ESE	STS			64						Left-side Grip
	SR-T13ESF	STS			141						Right-side Grip

STARION W1500 / 59.1" Table Refrigerator, Freezer/Refrigerator

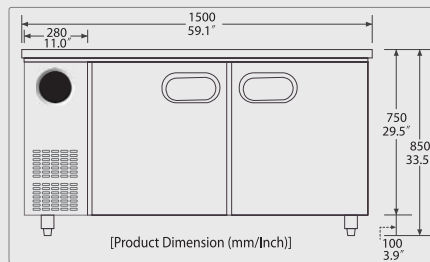

Type	Model	Material		Dimension (WxDxH)mm/Inch	Weight (kg/lb)	Capacity(ℓ/cu.ft.)			Temperature Range		Remark
		External	Internal			Freezer Chamber	Refrigeration Chamber	Total	Freezer Chamber	Refrigeration Chamber	
 W1500 / 59.1" Table	SR-T15EIE	Metal		1,500X700X850 59.1"x27.6"x33.5"	163 / 74	—	366	12.9	366	Control by a single unit (23°F ~ 50°F)	Both doors open
	SR-T15ESE	STS			157 / 71						12.9
 W1500 / 59.1" Table (Freezer / Refrigeration)	SR-T15AIE	Metal		1,500X700X850 59.1"x27.6"x33.5"	174 / 79	171.5	171.5	343	Control by a single unit (-13°F ~ 5°F)	(-25°C ~ -15°C)	Both doors open
	SR-T15ASE	STS			168 / 76						6.1
 W1500 / 59.1" Table (Freezer / Freezer)	SR-T15DIE	Metal		1,500X700X850 59.1"x27.6"x33.5"	170 / 77	366	—	366	Control by a single unit (-13°F ~ 5°F)	(-25°C ~ -15°C)	Both doors open
	SR-T15DSE	STS			163 / 74						12.9

STARION W1800 / 70.9" Table Refrigerator, Freezer/Refrigerator

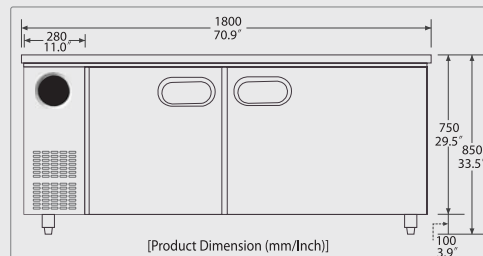

Type	Model	Material		Dimension (WxDxH)mm/Inch	Weight (kg/lb)	Capacity(ℓ/cu.ft.)			Temperature Range		Remark
		External	Internal			Freezer Chamber	Refrigeration Chamber	Total	Freezer Chamber	Refrigeration Chamber	
 W1800 / 70.9" Table	SR-T18EIE	Metal		1,800X700X850 70.9"x27.6"x33.5"	196 / 89	—	465	16.4	465	Control by a single unit (23°F ~ 50°F)	Both doors open
	SR-T18ESE	STS			190 / 86						16.4
 W1800 / 70.9" Table (Freezer / Refrigeration)	SR-T18AIE	Metal		1,800X700X850 70.9"x27.6"x33.5"	TBD	171.5	271.5	443	Control by a single unit (-13°F ~ 5°F)	(-25°C ~ -15°C)	Both doors open
	SR-T18ASE	STS			TBD						6.1

* STS = Stainless Steel

STARION | Dishwasher



Simple Display, Easy-to-use Instructions

It enhances user's convenience by minimizing operational buttons and indicating all processes through a display panel.



Powerful Washing through Jet Blast

Powerful cleaning pump dedicated to STARION models ensures thoroughly cleaning every inch of all dishes, cups and even bottles without leaving any stains through optimized cleaning nozzle.



Rust-proof/Leakage-free Water Tank

Made and assembled with the same material (stainless steel), it is completely free from any leakage.



Cleaning Time

Standard Period: 70 seconds
(Cleaning: 55 sec., Pause: 3 sec., Rinse: 12 sec.)
The time for cleaning and rinse can be adjusted to accommodate the user's preference.



Temporary Suspension Feature & Self-diagnosis Function

With thermal fuse and preventive device for excessive rise, it ensures safety by immediately suspending the operation while displaying the ERROR message.



Adjustable Cleaning Capacity Based on Given Environment

It implements optimal cleaning conditions through adjustability upon cleaning/rinse time as well as the volume of detergents and rinse agents.



Certifications (Korea Standards)

These products are certified for the safety and quality through acquisition of safety certificates/standard electromagnetic-wave certificates.



Solenoid pump for detergents & rinse agent

By employing solenoid pump for its superb durability and reactivity to detergents instead of roll pump, it prevents mechanical failures since it uses the proper volume of detergents.

Type	Model	Weight	Dimension (WxDxH)mm/Inch	Voltage	Max. Power Usage	Cleaning/Rinse				Cleaning Capacity (per hour)					
						Type	Tank Capacity	Cleaning/Rinse Time	Pump Capacity	Hot Water	Max. Temperature	Small & medium sized dishes	bowls	Large bowls	Cups
Dishwasher	SW-D500C	81Kg 176lb	with door closed 650×650×1,350 25.6"×25.6"×53.1"	220V-60Hz Single Phase	3.8 kW	Spraying type with upper/lower rotation	Cleaning: 42ℓ/1.5 cu.ft. Rinse: 28ℓ/1 cu.ft.	Cleaning: 35~95 seconds (set by a unit of 5 seconds) Rinse: 5~30 seconds (set by a unit of 1 second)	Cleaning: 1.1 kW Rinse: 0.1 kW	X	Cleaning 85°C / 185°F ± 10%	1,500	1,500	360	2,000
	SW-D500H	85 Kg 187lb	with door open 650×650×1,800 25.6"×25.6"×70.9"		5 kW							1,800		480	
												(EA)	(EA)	(EA)	(EA)



Customer First! STARION is here to serve customers.

A product just for you to make you even more special!
STARION Technology with 5 Decades of History!
It will make you even more special.

Electric Stove



Airo- Cook



STARION IDEA to
Change Your Lifestyle
STARION

Fans & Tower Fans



Rotary Heater & Air Heater



STARION www.starion.co.kr
STARION Service Center

- The information within this catalogue is prepared to help customers better understand the features of the products. The contents are subject to change depending on the future market trends and release dates; thus, it is strongly advised to verify the product information through product manuals and with salespersons at stores when purchasing the product.
- The colors of the products in this catalogue may vary from the actual products due to technicalities during the printing process.
- All unauthorized use of any information within this catalogue is subject to civil and criminal offenses pursuant to the Copyright Act.
Any unauthorized reproductions and duplications are strictly prohibited.
- Quality Satisfaction Awards is based on Korea standards.